

# **Zero Trust Branch**

A simpler, safer, more cost-effective way to connect and secure your branches, campuses, and factories

## Legacy Network and Security Architectures are Complex and Facilitate Ransomware Attacks

Traditional networks weren't built for today's distributed workforces and cloud-first apps. Using firewalls, VPNs, and legacy SD-WANs creates many security and operational challenges, including:

### Expanded Attack Surface

Extending networks to remote sites amplifies your attack surface. Firewalls and VPN gateways become targets, and zero-day threats are prevalent

### Lateral Threat Movement

Infected devices in branch offices can infect everything on your network — fast. Ransomware attacks can cause crippling outages in as little as 45 minutes

### Cost and Complexity

The complex mix of firewalls, proxies, NAC agents, and IPbased policies adds significant operational complexity and cost, hindering business agility

## Poor Performance and User Experience

Routing traffic through data centers and multiple security layers slows application performance and frustrates users

# **Zero Trust Branch**

### Delivers a café-like branch experience


Connect users and devices to apps without extending your network to every branch

# Stops lateral movement of ransomware

Segment users and OT/IoT devices in days—not months or years

# Cuts firewall and infrastructure spend by 50%

Eliminate N/S and E/W firewalls, NAC, expensive proprietary switches and device agents.

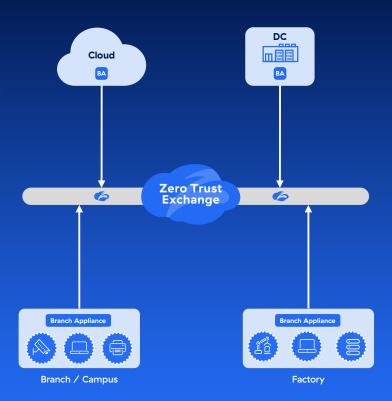

## How it works

Zscaler Zero Trust Branch securely connects and segments your branches, factories, and data centers without the complexity of VPNs or overlay routing. It enables zero trust access from users and IoT/OT devices to applications based on your organization's security policies. By combining the power of Zscaler's industry–leading Zero Trust Exchange platform with an integrated Branch appliance deployed in branches, campuses and factories, organizations can embrace a secure access service edge (SASE) framework, segment critical OT/IoT devices and enable a café–like branch.

Zero Trust Branch appliances directly terminate ISP connections and manage traffic forwarding across multiple links for maximum availability and resiliency. Branch and factory traffic is securely forwarded to the Zero Trust Exchange where rich Al-powered cyber threat and data protection policies can be enforced.

With our industry-leading zero trust architecture, sites are automatically segmented from each other, preventing the lateral movement of malware. Within each site, our innovative "network-of-one" segmentation technology automatically classifies and isolates each IoT/OT device without the need for NAC, scanners or endpoint agents. Autogrouping and threat-level based policies reduce the blast radius, simplify compliance and automate incident response, all without firewalls.

With automatic device discovery and classification, network administrators can simplify policy management by automatically grouping devices based on behavioral identity and avoid complex inventory management.

Zero Trust Branch appliances also feature an integrated AppConnector which facilitates third-party Privileged Remote Access to OT/IoT resources without the need for VPNs, jump boxes or VDI farms.

## **Zero Trust Branch Use Cases**

**VPN replacement:** Eliminate the complexity of site-to-site VPNs and routed overlays with a simpler, more cost effective solution that reduces your attack surface and stops the lateral movement of threats.

**IT/OT Segmentation:** Secure factories, hospitals and critical infrastructure by eliminating lateral movement between IT and OT systems. Get segmentation done in days, not months or years.

**SD-WAN refresh:** Adopt a cafe-like branch architecture and reduce ransomware risk. Enhance security with a Zero Trust Secure Access Service Edge (SASE) framework.

**Al-powered Device Discovery & Classification:**Discover, classify and inventory OT/IoT devices without the need for endpoint agents, scanners or traffic mirroring.

## **Zero Trust Branch Capabilities**

| Category                  | Features  |
|---------------------------|---|
| Zero Touch Provisioning   | <ul><li>Zero touch provisioning with pre-defined templates</li><li>Template and site-profile based deployment</li></ul>   |
| Traffic Forwarding Policy | <ul> <li>Flexible traffic selection criteria: dynamic groups, user and machine identity, five tuple, or FQDN</li> <li>Traffic forwarding options: ZIA, ZPA, or Direct</li> <li>Intelligent route priorities: static, dynamic, policy-based</li> <li>Direct site-to-site connectivity</li> </ul> |

©2025 Zscaler, Inc. All rights reserved. DATA SHEET 02

| Unified Zero Trust Policies      | <ul> <li>Unified policies: user-to-app, IoT device-to-app, and server-to-server</li> <li>Location and geo-based policies</li> <li>Comprehensive security inspection including IPS, SSL/TLS decryption, proxy, URL filtering and data protection</li> <li>Comprehensive protection for IoT/OT devices</li> <li>Inbound connectivity with AppConnector</li> </ul> |  |  |  |
|----------------------------------|---|--|--|--|
| Incident Response                | Ransomware Kill Switch  |  |  |  |
| Interfaces                       | <ul> <li>Multiple L3 LAN networks</li> <li>Multiple L3 WAN networks</li> <li>802.1q/VLAN tagging</li> <li>Link Aggregation (802.3ad)</li> <li>Dedicated management interface</li> </ul>   |  |  |  |
| High Availability                | <ul> <li>Two-node cluster with VRRP and session sync</li> <li>Interface health monitoring</li> <li>Config and state sync</li> <li>Hitless software upgrades</li> <li>In-service hardware replacement</li> </ul>   |  |  |  |
| Routing & Network Services       | <ul> <li>Static Routing</li> <li>Dynamic routing — BGP, OSPF</li> <li>Network Address Translation (source NAT)</li> <li>DHCP Server, Relay / Proxy</li> <li>Equal Cost Multi-Path (ECMP)</li> </ul>   |  |  |  |
| Device Isolation                 | <ul><li>Agentless device Isolation ("Network of ONE")</li><li>Dynamic micro-subnets</li><li>MAC address-based filtering</li></ul>   |  |  |  |
| Application Aware Path Selection | <ul> <li>Dynamic app-aware path selection</li> <li>Built-in link monitoring and failover</li> </ul>   |  |  |  |
| Zero Trust Segmentation          | <ul> <li>Autonomous grouping and policy</li> <li>IntraVLAN and InterVLAN policy control</li> <li>Flexible hierarchical policy framework based on devices, tags, users identity, time and, zones</li> </ul>  |  |  |  |
| Asset Discovery & Profiling      | <ul> <li>Endpoint and network discovery</li> <li>Device fingerprinting</li> <li>Profile-based device categorization</li> <li>ICS and Medical protocol decoding</li> </ul>   |  |  |  |
| Monitoring & Troubleshooting     | <ul> <li>Remote debug console</li> <li>Local CLI on Zero Trust Branch devices</li> <li>SNMP v2/v3 support</li> </ul>  |  |  |  |
| Centralized<br>Management        | <ul> <li>Single sign—on (SSO) and MFA</li> <li>Audit trails for login events, and configuration changes</li> <li>Role—based access control</li> <li>Multitenant cloud delivered platform with single UI</li> <li>OneAPI for comprehensive automation</li> <li>Dedicated Managed Service (MSSP) Portal</li> </ul>  |  |  |  |
| Visibility and Logging           | <ul> <li>Comprehensive session and transaction logging for all ports and protocols</li> <li>Traffic map with policy correlation</li> <li>Integrated Elastic data lake</li> <li>Session-init logs for all intra and inter segment communications</li> </ul>  |  |  |  |
| Integrations                     | <ul> <li>Microsoft Active Directory</li> <li>EDR Vendors – Crowdstrike, SentinelOne</li> <li>Asset Management – Armis, ServiceNOW, Ordr</li> </ul>  |  |  |  |
| Zscaler Data Centers / POPs      | <ul> <li>Global cloud security platform delivered from more than 150 data centers</li> <li>Built-in availability and redundancy with seamless PoP failover</li> </ul>   |  |  |  |

# **Zero Trust Branch Appliances**

Zscaler Zero Trust Branch appliances are available in a range of physical or virtual form factors for branch, campus and factory deployments.

|                           | ZT 400  | ZT 600   | ZT 800                 | ZT 8010*  |  |  |
|---------------------------|---|--|------------------------|---|--|--|
| Front<br>View             |   |  |                        |   |  |  |
| Ideal For                 | Small branch  | Small to medium branches                           | Branches,<br>Factories | Factories,<br>Campuses                            |  |  |
| CPU                       | 4C  | 4C   | 8C                     | 16C   |  |  |
| DRAM                      | 32 GB   | 32 GB  | 64 GB                  | 128 GB  |  |  |
| Storage                   | 256 GB  | 256 GB   | 512 GB                 | 1 TB  |  |  |
| ТРМ                       |   | 2.   | 0                      |   |  |  |
|                           |   |  |                        |   |  |  |
| LAN/WAN<br>RJ45 Ports     | 4 x 1GbE RJ45   | 6 x 1GbE RJ45                                      | 6 x 1GbE RJ45          | 10 x 1GbE RJ45                                    |  |  |
| LAN/WAN<br>Fiber Ports    | NO  | NO   | 2 x 1Gb SFP            | 8 x 10G SFP+                                      |  |  |
| USB Port                  | 1x USB 3.1  | USB 3.1 2x USB 2.0                                 |                        |   |  |  |
| Console Port              | 1 x RJ45  |  |                        |   |  |  |
|                           |   | Physical Specificat                                | ions                   |   |  |  |
| Factor Form               | Desktop   | Desktop  | Desktop                | Rackmount – 1U                                    |  |  |
| Dimensions<br>(W x H x D) | 6.61 x 1.26<br>x 7.20 in<br>(16.76 x 3.175<br>x 18.29 cm) | 9.09 x 1.73 x 7.78 in<br>(23.08 x 4.39 x 19.76 cm) |                        | 17.24 x 1.73 x 12.64 in<br>(43.8 x 4.4 x 32.1 cm) |  |  |
| Weight                    | 1.98 lbs<br>(O.898 kg)                                    | 2.64 lbs<br>(1.197 kg)                             |                        | 18.96 lbs<br>(8.6 kg)                             |  |  |
| Mounting<br>Brackets      | Rackmount/ Wallmount<br>(Optional Kit)                    | Rackmount included by default                      |                        |   |  |  |

©2025 Zscaler, Inc. All rights reserved. DATA SHEET 04

|                                 | ZT 400   | ZT 600  | ZT 800  | ZT 8010*  |  |  |  |
|---------------------------------|--|---|---|---|--|--|--|
| Power Specifications            |  |   |   |   |  |  |  |
| Power Supply                    | DC:  | Internal: AC  |   |   |  |  |  |
| Redundant<br>Power Supply       | No   |   |   | Yes (1+1)   |  |  |  |
| Typical Power<br>Consumption    | Idle Mode<br>— 12W<br>Full Load Mode<br>— 20W                          | Idle Mode<br>— 21W<br>Full Load Mode<br>— 29W                                   | ldle Mode<br>— 24W<br>Full Load Mode<br>— 43W | Idle Mode<br>— 107.8W<br>Full Load Mode<br>— 225.5W |  |  |  |
| Maximum<br>Power<br>Consumption | 40   | DW .  | 60W   | Redundant PSU: 300W<br>Single PSU: 350W             |  |  |  |
| Power Cord<br>Rating            | C14 10A  |   |   |   |  |  |  |
| Input<br>Range                  |  | Redundant PSU: AC<br>100~240V @50~60 Hz<br>Single PSU: AC 100~240V<br>@47~63 Hz |   |   |  |  |  |
| Input<br>Current                | 1.74   | amax  | 1.8Amax                                       | 5Amax   |  |  |  |
| Output<br>Rating                | 11.4 ~ 12.6∨   |   |   |   |  |  |  |
| Cooling                         | Fanless Fan  |   |   |   |  |  |  |
|                                 |  | Environmental Specific  | cations                                       |   |  |  |  |
| Operating<br>Temperature        | 32 ~ 104°F<br>(O ~ 40°C)   |   |   |   |  |  |  |
| Non-Operating<br>Temperature    | −4 ~ 150°F<br>(−20 ~ 70°C)   |   |   |   |  |  |  |
| Relative<br>Humidity            | 5% ~ 90%, Operating<br>5% ~ 95%, Non-operating                         |   |   |   |  |  |  |
| Altitude                        | 5,000 feet (1,524 m) Operating<br>50,000 feet (15,240 m) Non-operating |   |   |   |  |  |  |
| *Coming soon                    |  |   |   |   |  |  |  |

<sup>\*</sup>Coming soon

# **Ordering Information**

Zscaler Zero Trust Branch devices are sold as part of a subscription that includes the hardware and the cloud service. Please consult your Zscaler representative for subscription options and appliance selection based on bandwidth needs.

# **Experience** your world, secured.

#### About Zscaler

Zscaler (NASDAQ: ZS) accelerates digital transformation so that customers can be more agile, efficient, resilient, and secure. The Zscaler Zero Trust Exchange protects thousands of customers from cyberattacks and data loss by securely connecting users, devices, and applications in any location. Distributed across more than 150 data centers globally, the SSE-based Zero Trust Exchange is the world's largest inline cloud security platform. Learn more at zscaler.com or follow us on Twitter @zscaler.

© 2025 Zscaler, Inc. All rights reserved. Zscaler™, Zero Trust Exchange™, Zscaler internet Access™, ZPA™ and other trademarks listed at zscaler.com/legal/trademarks are either (i) registered trademarks or service marks or (ii) trademarks or service marks or (iii) trademarks or service marks or other countries. Any other trademarks are the properties of their respective owners.